

## 40-6515 & 40-6516 Self-Leveling Rotary Laser Levels

*Manual-leveling  
vertical plane with  
90° split beam*



*Locking mechanism  
protects inner pendulum*

*Self-leveling in  
horizontal plane*

### **FEATURES:**

- Locking mechanism protects inner pendulum during transport
- Self-leveling in horizontal plane
- Manual-leveling vertical plane with 90° split beam
- Visual and audible alarms when beyond self-leveling range
- Laser rotates at 200, 400, 600 RPM
- Integral vertical mount
- Indoor applications
- Outdoor applications with detector

### **40-6515 INCLUDES:**

- Self-leveling rotary laser level
- Tinted glasses
- 4 "AA" alkaline batteries
- Instruction manual with warranty card
- Soft-sided carrying case



### **40-6516 INCLUDES:**

- Self-leveling rotary laser level
- Tinted glasses
- 4 "AA" alkaline batteries
- Detector with 9V battery and clamp
- Instruction manual with warranty card
- Hardshell carrying case





# Rotary Laser Levels



## APPLICATIONS:

Drop ceilings, tiling, framing, windows/doors, shelving, grading, elevations, concrete forms, fences, decks, landscaping

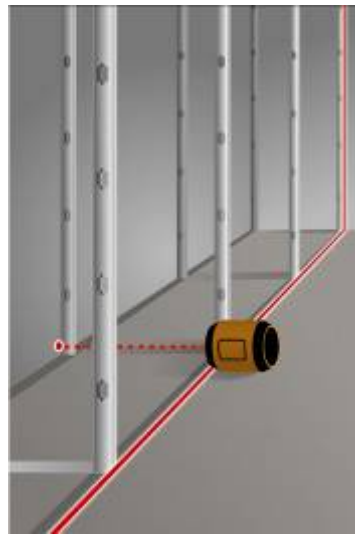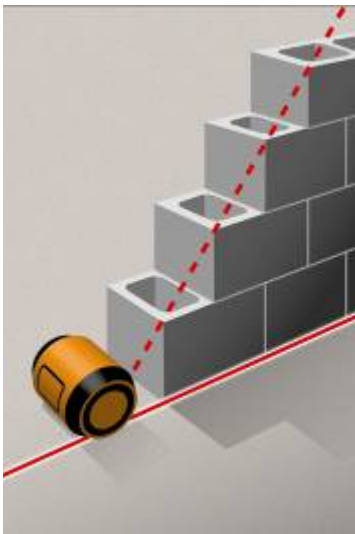

## 40-6515 & 40-6516 SPECIFICATIONS:

Laser wavelength	635nm±10nm
Laser classification	Class IIIa
Maximum power output	≤5mw
Accuracy	±1/8"/50'
Interior range	Up to 200' diameter depending upon light conditions
Exterior range	Up to 800' diameter with detector
Self-leveling range	±3°
Power supply	4 "AA" alkaline batteries (included)
Battery life	Approx. battery life 24 hours continuous use
Dimensions	4.96" x 6.69" x 6.61"
Weight	3.3 lbs
Working temperature	14°F to 113°F
Center screw thread	5/8"-11
Rotation speeds	200, 400, 600 RPM
IP protection class	54