


40-6522 Electronic Self-Leveling Rotary Laser Level with Integral Vertical Mount

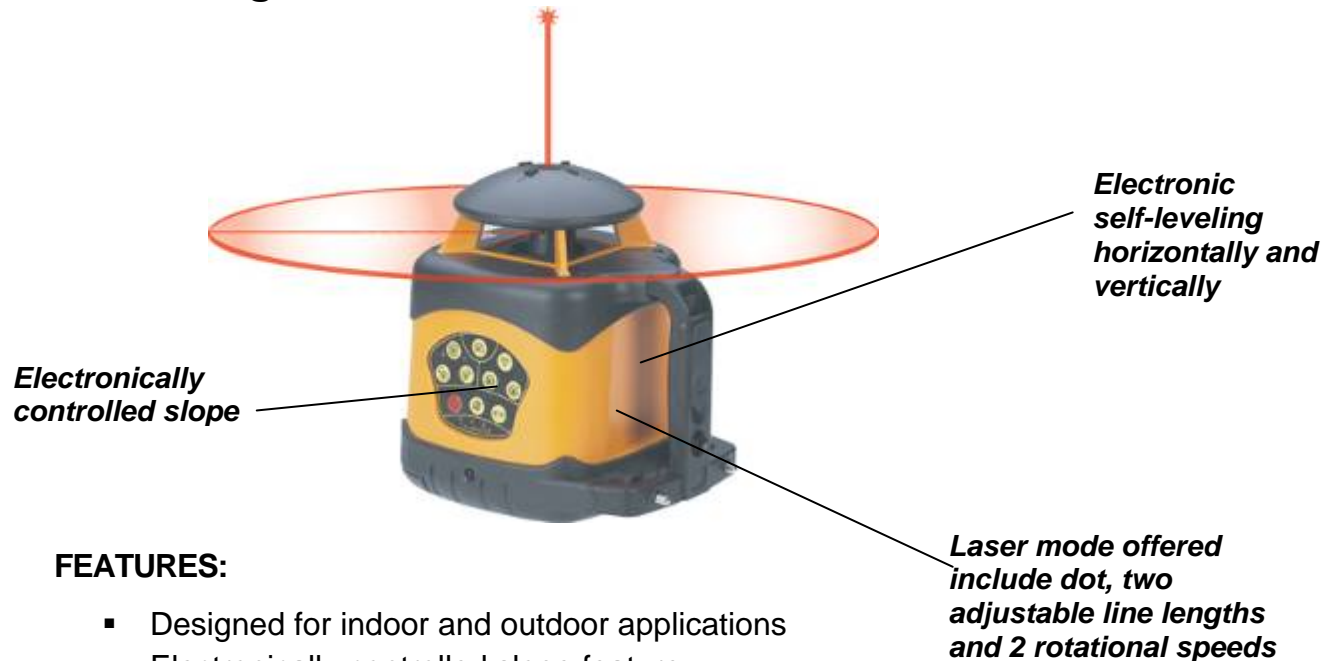

FEATURES:

- Designed for indoor and outdoor applications
- Electronically-controlled slope feature
- Electronic self-leveling horizontally and vertically
- Laser mode offered include dot, two adjustable line lengths and 2 rotational speeds
- Visual and audible alarms when beyond self leveling range
- Two rotational speeds: 120 and 500 RPM

40-6522 INCLUDES:


- Electronic leveling rotary laser level with integral vertical mount
- Ni-MH rechargeable battery pack
- 6V battery adapter
- Remote control with 9V battery
- Detector with 2 "AA" batteries and quick clamp
- Magnetic target
- Tinted glasses
- Instruction manual with warranty card
- Hardshell carrying case



Rotary Laser Level

APPLICATIONS:

Grading, elevations, concrete forms, landscaping, driveway paving, machine control, excavations, digging footings and septic tanks, drop ceilings, tiling, framing, windows/doors, shelving, cabinets

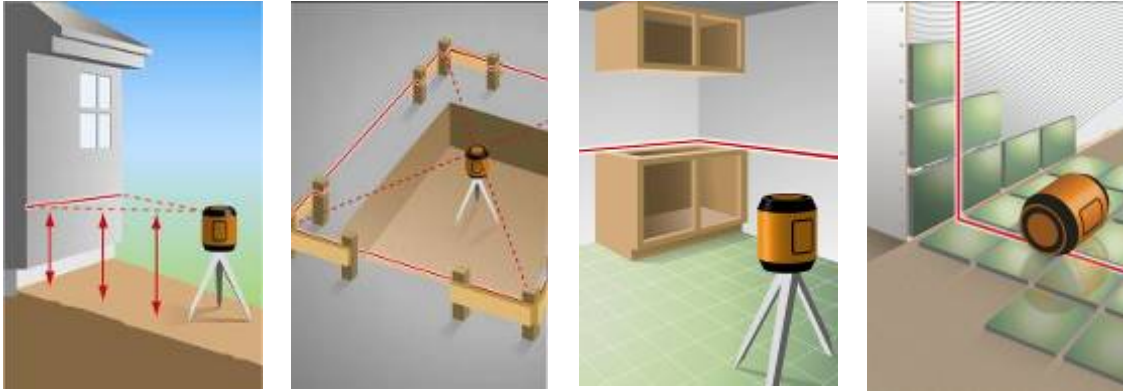

40-6522 SPECIFICATIONS:

Laser wavelength	635nm±10nm
Laser classification	Class IIIa
Maximum power output	≤5mw
Accuracy	±1/16"/100'
Interior range	Up to 200' diameter depending upon light conditions
Exterior range	Up to 2000' diameter with detector
Remote range	Up to 200' diameter
Slope	±8°
Auto-leveling range	±5°
Power supply	Rechargeable battery pack or 6V adapter (included), 4 "C" alkaline batteries (not included)
Battery life	Approx. battery life 20 hours rechargeable battery pack
Dimensions	5.75" x 7.75" x 7.625"
Weight	4.4 lbs
Working temperature	14°F to 113°F
Center screw thread	5/8"-11
Scanning modes (degrees)	0,30,60
Rotation speeds	120 and 500 RPM
IP protection class	66