

40-6530 Self-leveling Rotary Laser Level



FEATURES:

- For indoor and outdoor use
- Self-leveling horizontal plane
- Locking mechanism protects inner pendulum during transport
- Manual-leveling vertical plane with 90° split beam
- Laser modes offered include dot, two adjustable line lengths and rotational speeds between 150-300 RPM
- Visual and audible alarms when beyond self leveling range

40-6530 INCLUDES:

- Self-leveling rotary laser level
- Ni-MH rechargeable battery pack
- "C" alkaline battery holder (batteries not included)
- 6V battery adapter
- Vertical mounting adapter
- Detector with 9V battery and quick clamp
- Tinted glasses
- Instruction manual with warranty card
- Hardshell carrying case





Rotary Laser Level

APPLICATIONS:

Indoor – drop ceilings, tiling, framing, windows/doors, shelving, cabinets

Outdoor – grading, elevations, concrete forms, fences, decks

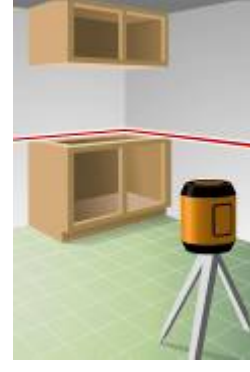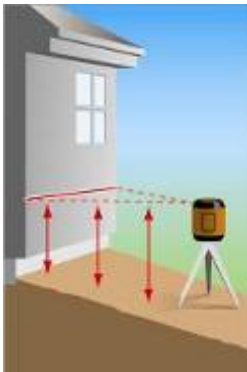

40-6530 SPECIFICATIONS:

Laser wavelength	635nm±10nm
Laser classification	Class IIIa
Maximum power output	≤5mw
Accuracy	±1/8"/100'
Interior range	Up to 200' diameter depending upon light conditions
Exterior range	Up to 2000' diameter with detector
Self-leveling range	±3.5°
Power supply	Rechargeable battery pack or 6V adapter (included), or 4 "C" alkaline batteries (not included)
Battery life	Approx. battery life 20 hours rechargeable batteries
Dimensions	5.75" x 7.75" x 7.625"
Weight	4.4lbs
Working temperature	14°F to 113°F
Center screw thread	5/8"-11
Scanning mode (degrees)	0, 30, 60
Rotation speeds	150 - 300 RPM
IP protection class	56