

40-6535 Electronic Self- Leveling Horizontal Rotary Laser Level



FEATURES:

- Simple set-up
- Designed for outdoor use
- Large $\pm 5^\circ$ electronic self-leveling range
- Electronically-controlled dual slope feature with remote control
- Visual and audible alarms when beyond leveling range
- Single speed rotation 700 RPM
- Slope operation function allows user to perform slope 8° in both x and y axis
- Height of Instrument (H.I) alarm function ensures product accuracy
- Remote control and detector included for one person operation

40-6535 INCLUDES:


- Electronic self-leveling horizontal laser level
- Ni-MH rechargeable battery pack
- 6V battery adapter
- Remote control with 9V battery
- Detector with 2 "AA" batteries and clamp
- Instruction manual with warranty card
- Hardshell carrying case



Rotary Laser Level

APPLICATIONS:

Grading, elevations, concrete forms, landscaping, driveway paving, machine control, excavations, digging footings and septic tanks

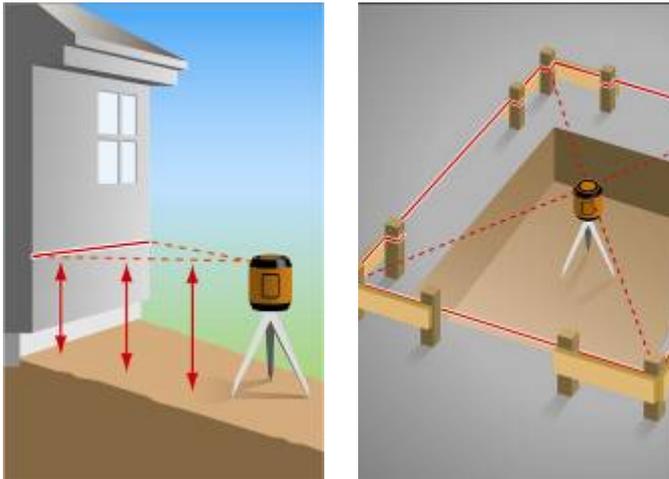

40-6535 SPECIFICATIONS:

Laser wavelength	635nm±10nm
Laser classification	Class IIIa
Maximum power output	≤5mW
Accuracy	±1/16"/100'
Exterior range	Up to 2000' diameter with detector
Remote range	Up to 200' diameter
Slope	+8°
Auto-leveling range	+5°
Power supply	Rechargeable battery pack or 6V adapter (included), or 4 "C" alkaline batteries (not included)
Battery life	Approx. battery life 20 hours continuous use
Dimensions	7.4" x 5.91" x 8.15"
Weight	5.51 lbs
Working temperature	14°F to 113°F
Center screw thread	5/8"-11
Rotation speeds	700 RPM
IP protection class	66